

# Easee Home

Easee Home is intelligent and adapts to all electric vehicles, power voltages and mains. The charging robot will automatically detect whether the car supports 3-phase or not. There is no need to think about technical specifications, the Easee Home always adapts to the car's needs and delivers the maximum power available at your home.



Why choose Easee Home?

# Forward-looking home charging



## Benefits

- Fully dynamic charging power 1.4 - 22kW (1 and 3 phase charging)
- Load balancing of up to 3 units per fuse without additional infrastructure (wireless)
- Automatic queuing system
- The load and phase balancing works offline
- Integrated 4G in each box (e-sim), free subscription included for life
- Possibility of WIFI connection
- Permanent locking of the Type 2 cable
- Integrated earth fault protection - (Integral-type B RCD)
- Integrated RFID reader (NFC / ISO 14443 and MiFare Classic)
- Energy measurement (+/- 3%), -for reading charge consumption
- Developed and manufactured in Norway
- The box is 69% smaller than other solutions and weighs only 1.5kg
- 3 year warranty, from the day the charger is installed
- Universal, fits all types of electric cars and mains
- Manual and digital control (Free Easee app)
- You choose the colour

Why choose Easee Home?

# 22<sub>kW</sub>

## Full of power

The charger can charge on both 1 and 3 phase and supports charging up to 22 kW. It has a Type 2 standard charging connector.

# 10<sub>x</sub>

## Quick charge

With Easee Home, you can charge up to 10x\* times faster than with a regular outlet. It charges as quickly as possible with the available capacity and provides you with the highest charging power. \*10x times faster charge requires a 3-phase installation. With 1 phase you will still get 3 times faster charge.

# 3<sub>x</sub>

## Optimized charging effect

You can have up to 3 charging robots on one fuse. All connected cars can be charged at the same time, and the available power is distributed automatically and dynamically between the vehicles. The total load will thus never exceed the set limit for the fuse.

# 4<sub>G</sub>

## Internet access

All our charging robots are connected to the internet with integrated 4G\*. If you buy now you get a 4G subscription included for life. That means you don't have to worry about having wifi coverage in your garage. \*Assuming 4G coverage is available

# 69%

## Small

The charging robot is 69% smaller and lighter than other electric chargers, with similar functionality. It weighs only 1.5kg! This means that we save the environment at least 4 kilos of copper and plastic per produced charger.

# 24<sub>/17</sub>

## Always updated

The charging robot is updated with new features continuously. This way, you know that you have purchased a safe and future-proof product.

# 5<sub>x</sub>

## A colorful choice

We have covers in five different colors; White, Anthracite, Red, Blue and Black. The choice is yours.

# 3<sub>yr</sub>

## Warranty

We want you as a customer to have confidence that you have bought lasting quality. A product from Easee comes with a 3 year warranty.

## Why choose Easee Home?

---

### Made in Norway - for Norwegian weather conditions

We develop and manufacture our products in Norway. Our products are developed for being able to withstand harsh environments. Not only is it tough it is also small! Our charging robot is 69% smaller than other ev-chargers. It only weights 1,5kg. We have strived to contribute to a sustainable future and are saving the enviroment for 4 kilos of copper and plastics per produced charger.

The charger thrives just as well on the outside of a house as inside a garage. Its components are of high quality and is composed in a very special way. It is IP56 certified and designed to withstand the Norwegian climate.

We want you as a customer to have confidence that you have bought lasting quality. One product from Easee comes with a 3 year warranty.



### Feel safe

We've added 3 extra levels of security, so that we can sleep well at night, knowing that you can do it too. Safety is an important part of the design.

With an Easee Charging Robot you can be assured that charging is done safely. The charging robot is designed to the latest standards. In addition, there is built-in electronic earth fault protection that ensures detection of DC and ground faults.

The charging robot is also equipped with temperature sensors and protection to prevent overheating. You also don't have to worry about crooks, the charging cable can be permanently locked in the box via the app or the local wifi interface.



## Why choose Easee Home?

### Easy when you get two electric cars

We have made it easy and affordable to invest in modern and forward-looking charging infrastructure. With “Easee Ready” docking station you get a completely EV ready charge point at low cost. By pre-installing an Easee Home charge point, it is possible upon demand to subsequently deploy our innovative “Plug & Play” technology at no additional installation cost.


The charging robot acts as an intelligent junction box and it supports the expansion of multiple charging stations on the same cable.



### Easee App

With the Easee app it is possible to control and plan when your car is charging. You can see live values for the current charge session and get an overview of your consumption. If you want to avoid finding the charging cable every time you charge the car, you can easily lock the cable permanently in the Charging Robot through the app.

You get full control over who can charge and when they can charge. We update the app periodically to make your Charging Robot even smarter.

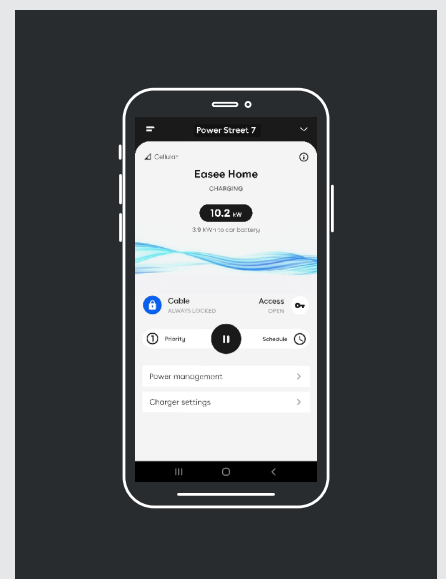

# Specifications

Measurement  
in mm



## Technical

### General

Dimension (mm): H: 256 x W: 193 x D: 106  
Operating temperature: - 30°C to + 40°C  
Weight: 1.5 kg

### Charging

Charging power: 1.4 - 22 kW  
6A 1 phase - 32A 3 phase (automatically  
adjusted in relation to available capacity)  
Up to 7.36kW at 32A 1 phase  
Up to 22kW at 32A 3 phase (TN grid)  
Number of phases: 1 and 3 (fully dynamic)  
Charging connector: Type 2, Female (IEC  
62196-2)  
Voltage: 230V / 400V AC (+ -10%)  
Advanced load distribution  
Up to 3 charging robots on the same fuse  
Automatic locking of charging connector  
Built-in energy meter

### Connectivity

Built-in 4G / GPRS  
WiFi 2.4 GHz b / g / n connection  
Control charging with the Easee app  
RFID / NFC reader  
OCPP 1.6 via our API

### Sensors and indicators

Light strip showing the status of the charger  
Touch button for manual adjustment  
Brightness control sensor  
Temperature sensors in all main contacts


## Colours




<b>Safety</b>	<p><b>Protection</b></p> <p>Built-in Type-B ground fault protection (30mA AC / 6mA DC)  Enclosure degree: IP54 (electronics module)  Impact resistance: IK10  Fire class: UL94  UV resistant  Insulation class: II  Over voltage category III (4,5kV AC and 6kV impulse insulation tolerance)</p> <p><b>Theft Protection</b></p> <p>Electronics can be deactivated and tracked in case of theft.  The electronics can be permanently locked using a padlock (not visible).  The charging cable can be locked permanently in the charging station.</p>	<p><b>Complies with the following standards</b></p> <p>EN/IEC 61000-6-2 (2005)  EN/IEC 61000-6-3 (2007 / 2011)  EN/IEC 61000-32 (2014)  EN/IEC 61000-3-3 (2013)  EN/IEC 60529-1 (1999 / 2013)  EN/IEC 60950-1 (2009 / 2013)  EN/IEC 62955 (2018)  EN/IEC 61009 (2010 / 2012 / 2013)  EN/IEC 60950-22 (2005)  EN/IEC 61851-1 (2010 / 2017)  EN/IEC 61851-22 (2001)  EN/IEC 62196-1 (2014)  EN/IEC 62196-2 (2017)  Radio Equipment Directive 2014/ 53/EU  ROHS directive 2011 /65/EU  CE Konform</p>
---------------	---	--

<b>Installation</b>	<p><b>Power grids and fuses</b></p> <p>Installation network: TN, IT and TT (detected automatically)  Installation fuse: Max 32A, pre-connected  A-protection on installation fuse for the charging robots.</p>	<p><b>Integrated circuit in backplate</b></p> <table border="0"> <tr> <td>Cable cross-section:</td> <td>1.5-10 mm<sup>2</sup></td> </tr> <tr> <td>Cable diameter:</td> <td>8-22 mm</td> </tr> <tr> <td>Terminal Tightening:</td> <td>5 Nm</td> </tr> <tr> <td>Cable Strip Length:</td> <td>12 mm</td> </tr> </table>	Cable cross-section:	1.5-10 mm <sup>2</sup>	Cable diameter:	8-22 mm	Terminal Tightening:	5 Nm	Cable Strip Length:	12 mm
Cable cross-section:	1.5-10 mm <sup>2</sup>									
Cable diameter:	8-22 mm									
Terminal Tightening:	5 Nm									
Cable Strip Length:	12 mm									


**The product contains**



Backplate



Chargeberry



Cover



Easee AS  
Professor Olav Hanssens vei 7A,  
N-4021 Stavanger  
Org.nr: 920 292 046

Easee is distributed and maintained by a network of qualified partners and resellers. Find more information and your local partner at:

[www.easee.no](http://www.easee.no)